



13th IWA Specialized Conference on Small Water and Wastewater Systems (SWWS) 5th IWA Specialized Conference on Resources-Oriented Sanitation (ROS)

14 - 16 September 2016

Extension of the SMART-Plant concept to small wastewater treatment plants

Francesco Fatone and the SMART-Plant Consortium





The SMART-Plant Consortium









Contents

 The Horizon2020 SMART-Plant innovations and technicaleconomic sustainability in small WWTPs

ALTERNATIVE SMALL AND DECENTRALIZED SOLUTIONS?

- Co-treatment of municipal wastewater and organic waste
- Centralized treatment vs sewer mining (the new «concept» of decentralization): the WATINTECH project
- Decentralized nutrient recovery: the URBANLOOP project







Resources embedded to municipal wastewater

Parameter	Value		
Reusable water (m³/capita year)			
Cellulose (kg/capita year)			
Biopolymers; PHA (kg/capita year)			
Phosphorus in P precursors (kg/capita year)			
Nitrogen in N precursors (kg/capita year)			
Methane (m³/ capita year)			
Organic Fertilizer (P-rich compost) (kg/capita year)			


Verstraete et al. (2009) *Bioresource Technology* 100, 5537–5545 Salehizadej and van Loosdrecht (2004) *Biotechnology Advances* 22, 261–279







SMART-Plant overall target

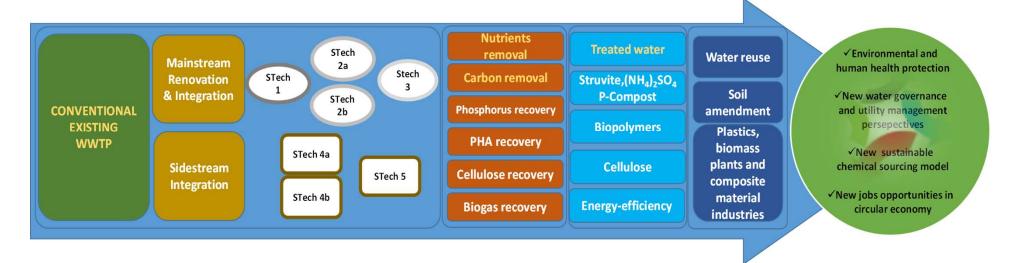

The overall target of SMART-Plant is to validate and to address to the market a portfolio of SMARTechnologies that, singularly or combined, can renovate and upgrade existing wastewater treatment plants and give the added value of instigating the paradigm change towards efficient wastewater-based bio-refineries.




Supported by the Horizon 2020 Framework Programme of the European Union





The SMART-Plant partners

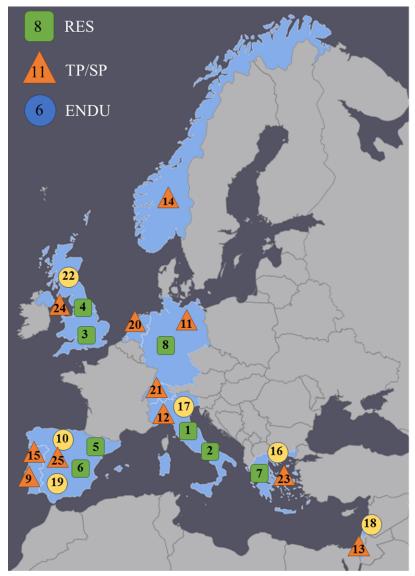

Countries of the SMART-Plant project

Partners from EU and associated countries:

1. UNIVR

. . . .

2. UR3. UBRUN

4. CU

5. UAB

o. Und

6. UVIC-UCC

7. NTUA

8. KWB

9. BIOTR10. SOC

10. SOC

11. BYK

12. SCAE

13. AGRB

14. SALSNES

15. IBET

16. EYDAP

17. ATS

18. MEKOROT

19. AdM

20. BWA

21. EXC

22. STW

23. AKTOR

24. ECODEK


25. WSC







SMART-Plant open the pathway to deliver circular economy

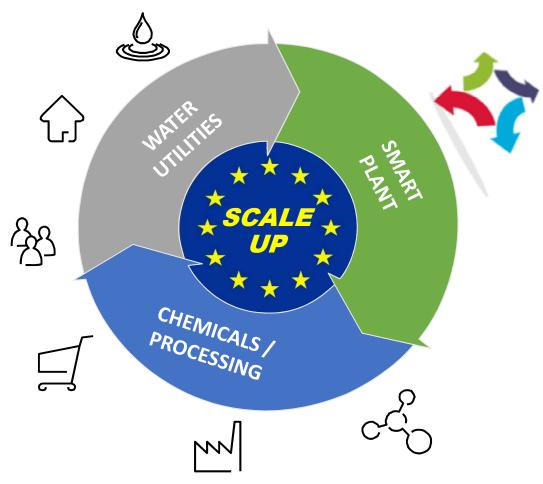








SMART-Plant Business plan and market deployment strategy

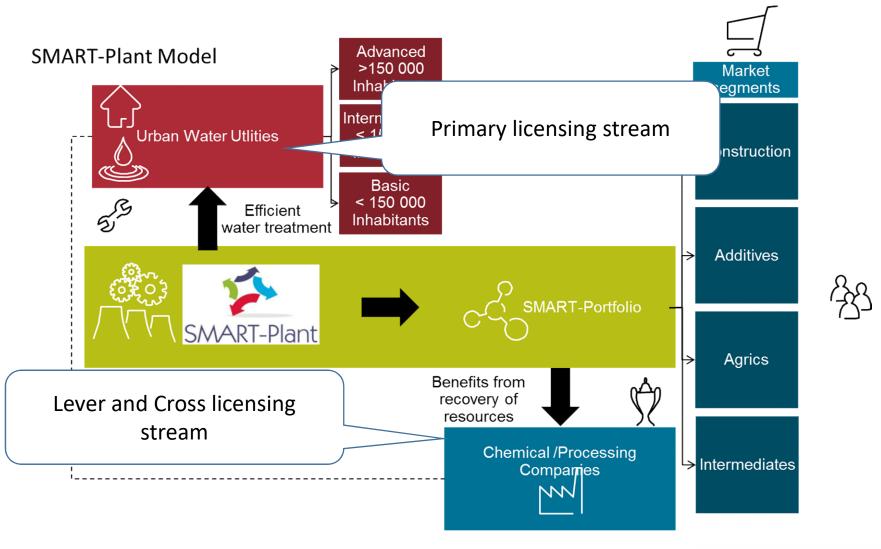




Supported by the Horizon 2020

Framework Programme of the European Union





The SMARTechnologies

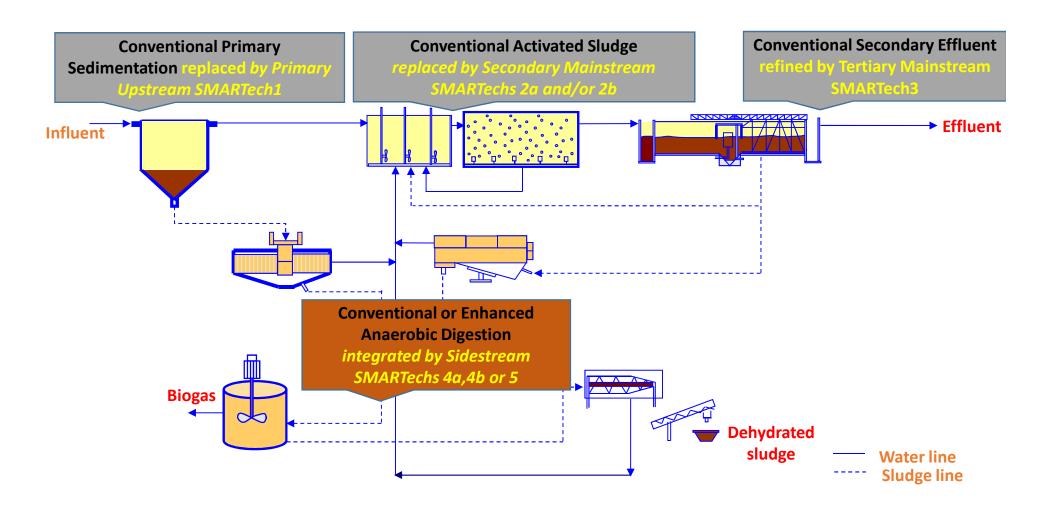







The SMART-Plant integrated WWTPs


SMARTec	Integrated	Key enabling process(es)	SMART-product(s)
h n.	municipal WWTP		
1	Uithuizermeeden	Upstream dynamic fine-screen	Cellulosic sludge, refined
	(Netherlands)	and post-processing of cellulosic	clean cellulose
		sludge	
2a	Karmiel (Israel)	Mainstream polyurethane-based	Biogas, Energy-efficient
		anaerobic biofilter	water reuse
2b	Manresa (Spain)	Mainstream SCEPPHAS	P-rich sludge, PHA
3	Cranfield (UK)	Mainstream tertiary hybrid ion	Nutrients
		exchange	
4a	Carbonera (Italy)	Sidestream SCENA+conventional	P-rich sludge, VFA
		AD	
4b	Psyttalia (Greece)	Sidestream SCENA+enhanced AD	P-rich sludge
5	Carbonera (Italy)	Sidestream SCEPPHAR	PHA, struvite, VFA








Is "small" relevant in Italy?

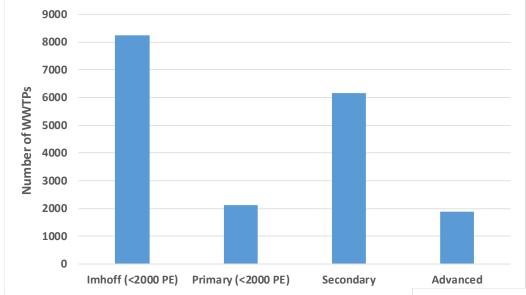

But: N and P effluent quality standard must be achieved for each WWTP if the agglomeration is larger than 100 000 PE

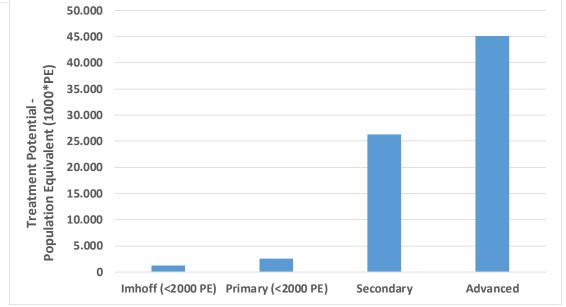








And in the EU?


Q2011

■Q2013

Number of UWWTPs per UWWTP size class

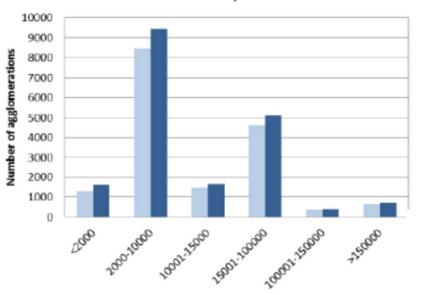

Load in p.e. per UWWTP size class

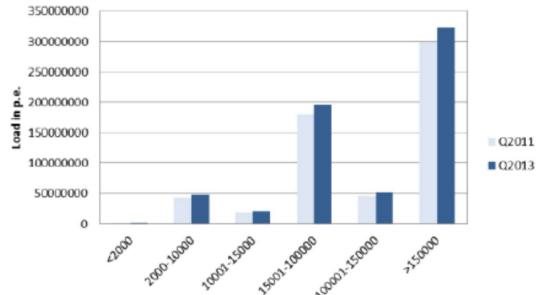








SMARTech1: Primary (upstream) dynamic sieving and clean cellulose recovery

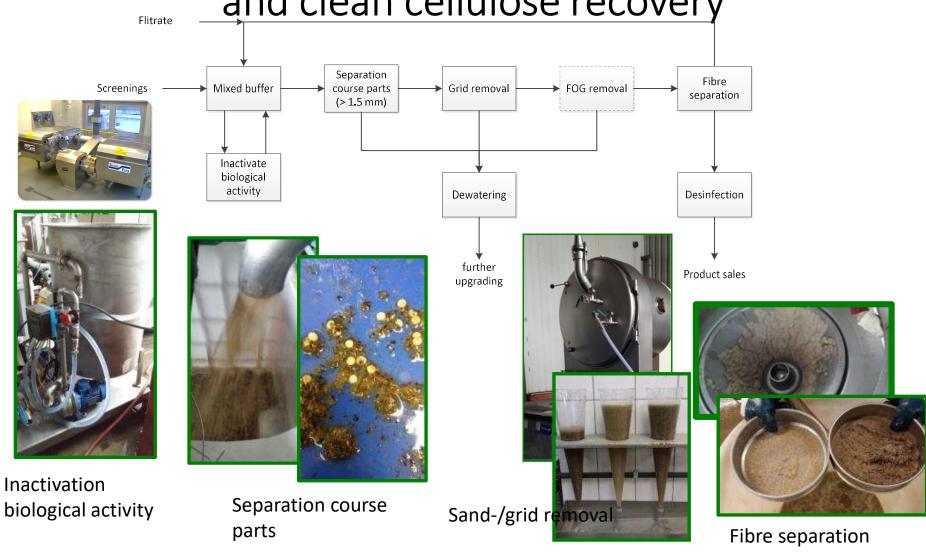









SMARTech1: Primary (upstream) dynamic sieving and clean cellulose recovery

- 79% cellulose fiber,
- 5 % other organics,
- 6% inorganic (ash)
- 10% other contaminants (average in The Netherlands).
 potentially marketable product, but the economic feasibility depends
 mainly on savings at the WWTP

Market development

- ✓ Marketing and valorization of recovered cellulose
 - ✓ Reuse in asphalt
 - √ Raw material for composite (Brunel)
 - ✓ Insulation materials (In development, not sure yet)

















Extension to existing small WWTPs?

- ✓ At WWTPs larger than 20 000 PE, not having primary sedimentation, the payback period of a RBF installation would be about 5-8 years.
- ✓ At WWTPs larger bigger than 80 000 PE the payback is closer to 8 years.
- ✓ If primary sedimentation is present, the payback period would be 10-12 years
- ✓ In case of a fully- or over-loaded WWTP, finescreens could prevent an extension of the biology and secondary clarifiers, making it a good alternative for other solutions.

Source: BWA, internal communication







Extension to existing small WWTPs?

From the preliminary market studies (to be detailed within SMART-Plant) **BWA** learned that:

 at least 800-1200 kg/d (30000-70000 PE) clean cellulose must be recovered to upgrade it economically at WWTP level. 1 WWTP however is not enough to create a stable discharge channel. Our first estimate is that we would need at least 2000-3000 kg/day (100000-170000 PE) of cellulose for profitable valorization.







SMARTech2a: Secondary mainstream biogas recovery by polyfoam biofilter

- An innovative anaerobic immobilized polymeric biofilter.
- 2. Reaction volume -25 m³ will be designed and installed in the WWTP of Karmiel (North of Israel)
- 3. Characteristics:
- 100-120 m³/d (480 PE).
- Removal of 30-40% of CODf
- Additional of 25% biogas
- Reduction of 25-30% energy consumption.
- 4. Operation optimization, monitoring and validation:
- biogas yield
- biomass activity
- treated effluent quality









SMARTech2a: Secondary mainstream biogas recovery by polyfoam biofilter


- Compact system
- Flexible to fluctuations
- Tested in full scale

Extendible to small WWTPs







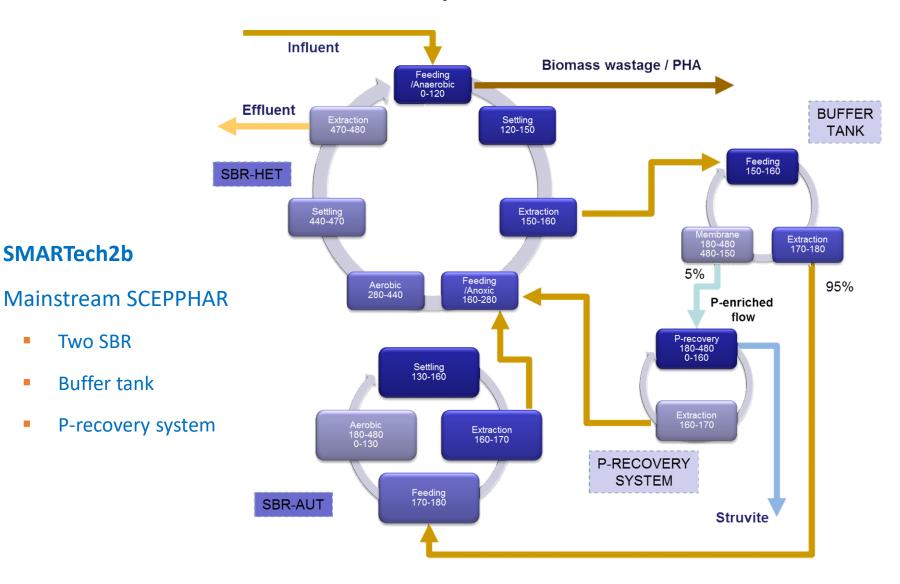



SMARTech2b

Two SBR

Buffer tank






SMARTech2b

Mainstream SCEPPHAR

- Two SBR
- Buffer tank
- P-recovery system



Two sludge system with separated SRT control for each SBR:

- More stable nitrification throughout the year
- Selection of optimal SRT for PHA production

Higher N removal by nitritation/denitritation:

- Up to 25% less aeration requirements
- Up to 40% lower COD requirements








SMARTech2b

Mainstream SCEPPHAR

- Two SBR
- Buffer tank
- P-recovery system



Most part of P is removed with an anaerobic water extraction:

- 5% of the reactor volume extracted at the end of the anaerobic phase contains > 60% of P in the influent
- P concentration is 6x P influent, facilitatingP-recovery

Anaerobic biomass purge:

- Increased PHA content in the biomass: up to 20%
- Sludge with much lower PolyP content: avoids undesired struvite precipitation in the anaerobic digester







- Improved effluent quality (lower N & P)
- Lower operational costs
- P and PHA recovery


New design for small WWTP!







SMARTech3: Tertiary nutrient recovery by mesolite and nano ion exchange

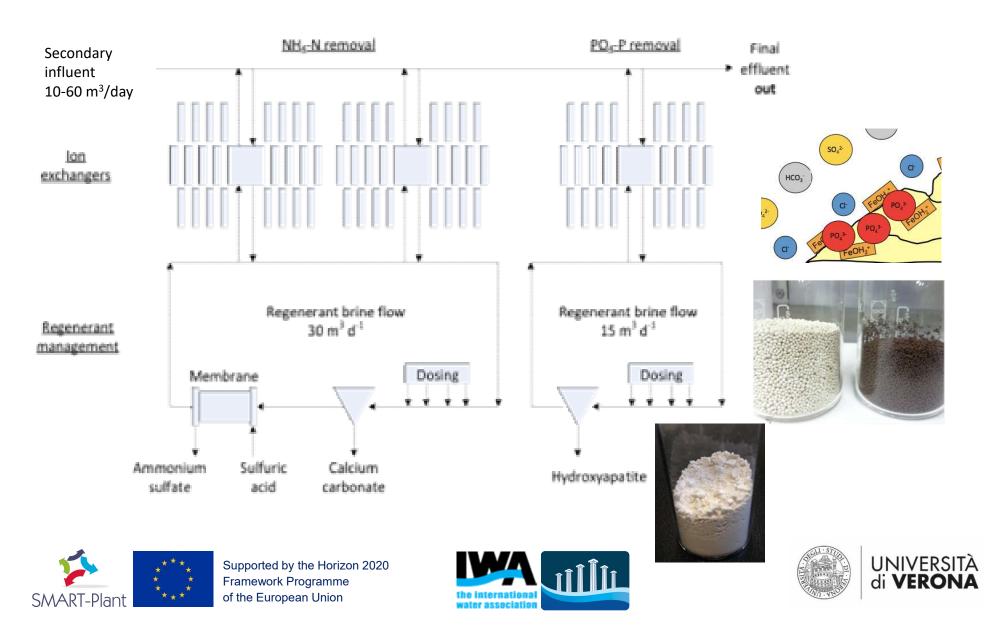

SMARTech3: Tertiary nutrient recovery by mesolite and nano ion exchange

- Automatic adsorption system
- Able to achieve very low (required) effluent P and N concentration
- N and P recovery is added value
- Tested in demo (small) scale

Extendible to small WWTPs!










SMARTech4a/b Sidestream S.C.E.N.A.

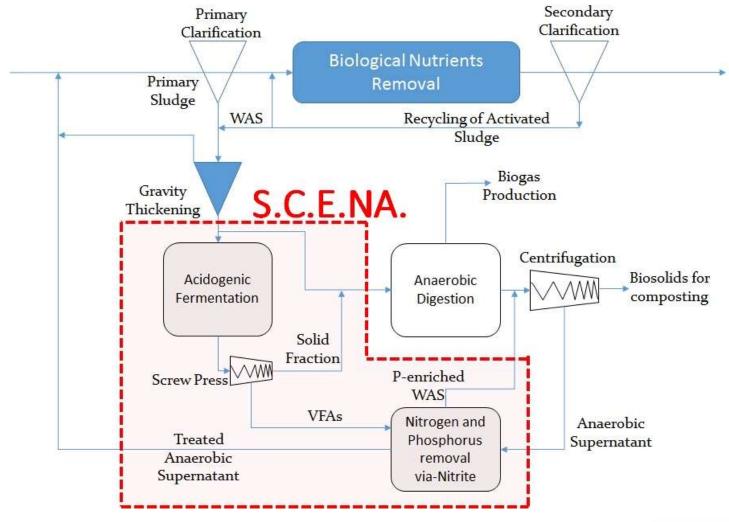










SMARTech5 Sidestream SCEPPHAR

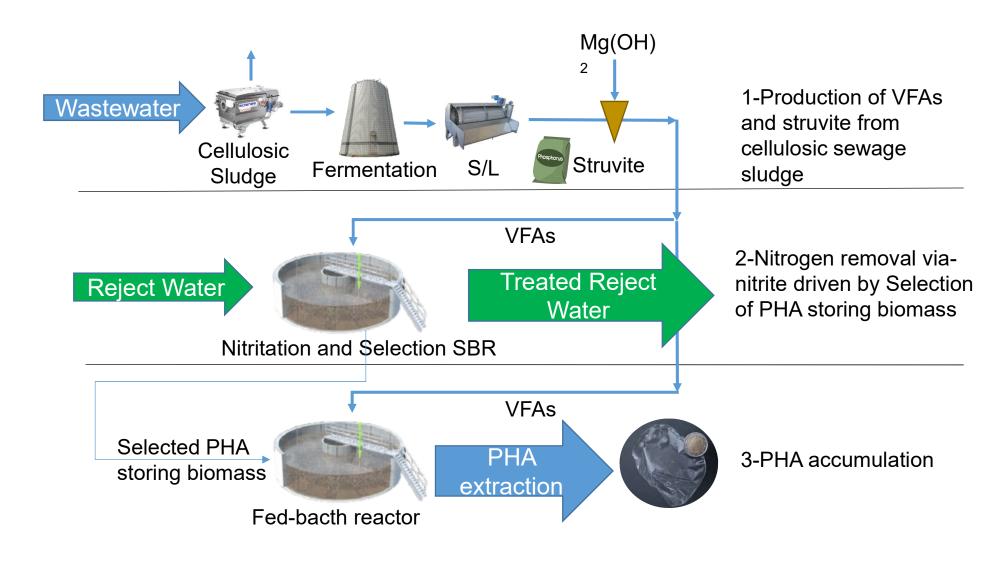








PHA and BioP in small WWTPs?







PHA and BioP in small WWTPs

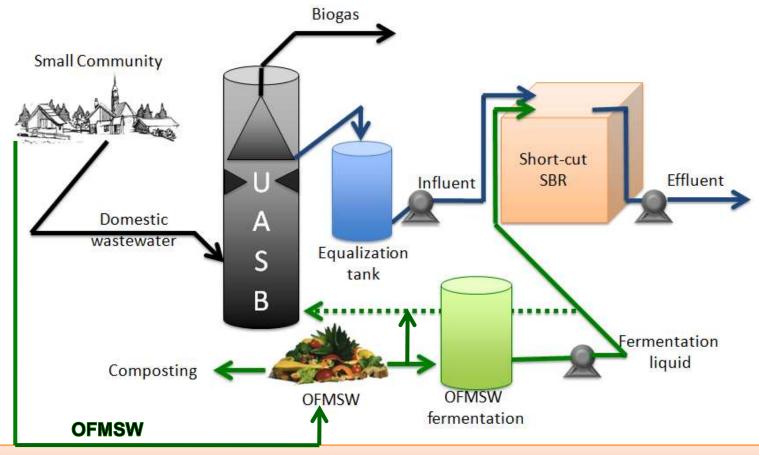

Integrated system for the treatment of municipal wastewater by applying foodwaste derived external carbon source





Supported by the Horizon 2020 Framework Programme

of the European Union





WATINTECH (coordinated by Recoordinated by Recoordinated

WATINTECH will develop effective decentralized treatment concepts for sewage and urban run-off to recover:

- Water
- Energy (methane)
- Value-added products (caustic, oxygen)


A key innovation of WATINTECH will be the smart integration of different water sources and decentralized and centralized infrastructure creating novel synergies.







WATINTECH

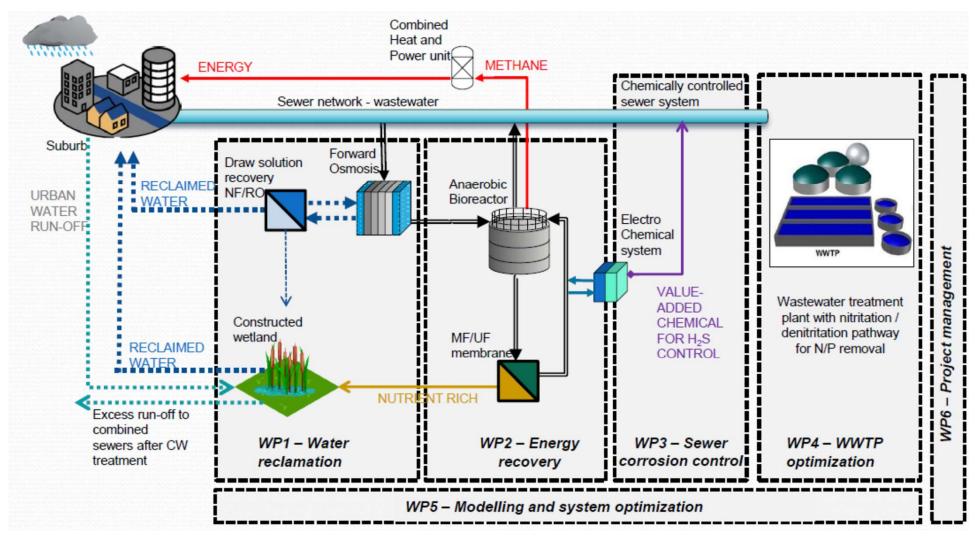

Courtesy of ICRA







URBANLOOP (coordinated by UdG)











Final considerations

- Thousands small WWTPs will need revamp/renovation to reach lower effluent standard of N and P. This challenge could be a great opportunity to boost decentralized water reuse in water scarce area
- The SMART-Plant business model focuses on medium-large WWTPs. Local reuse would fit better to small systems
- Some SMARTechnologies can be extended to small WWTPs and achieve energy efficiency and better performances
- When focusing on new small and decentralized concepts integrated municipal treatments and/or sewer mining concepts are promising and worthy of investigation







Thank you for your attention!







